

FURROW WIDENERS

Fitted to the rearmost body of the plough, the furrow widener cuts and removes a section of the furrow wall to enable oversized tyres of up to 32in (810mm) to be accommodated on the subsequent ploughing pass. The use of a furrow widener is advised when using a tractor with tyres wider than 24in (610mm).

Used to prevent the wheels running on top of and compacting the previously turned furrow. Furrow wideners are available in a range of widths to suit different sizes of tyres. See the table below for selecting the correct option.

If the plough is already fitted with a wear pad on the landside of the rear furrow, it is only necessary to purchase a pair of furrow wideners (fixings are supplied free of charge).


Check the diagram for the required items.

Rear landside
DD/DDS 1137498(RH) 1137499(LH)
UCN/SCN 1096698(RH) 1096699(LH)

Rear stay bar
DD/DDS 1147100
UCN/SCN 1096700

Rear stay bar bracket
DD/DDS 1147200
UCN/SCN 1096898(RH) 1096899(LH)

DD/DDS M20 Nut 900775 (2 off)
UCN/SCN 3/4" Nut 900497 (2 off)

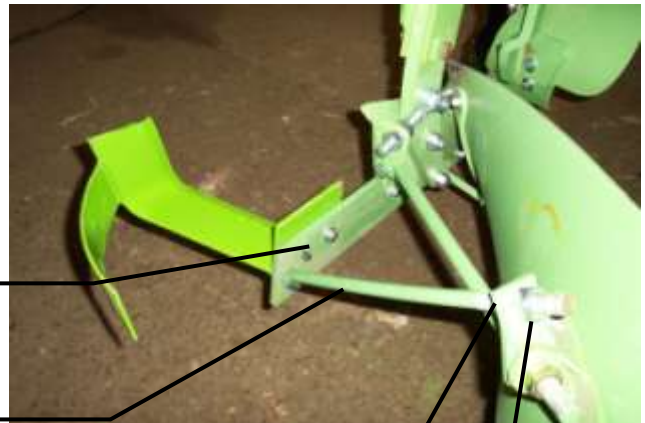

Part Number	Body Type	Tyre Width	Body Type	Tyre Width
1240098 – RH 6"	UCN/SCN	24in (610mm)	DD	26in (660mm)
1240099 – LH 6"	UCN/SCN	24in (610mm)	DD	26in (660mm)
1240198 – RH 8"	UCN/SCN	26in (660mm)	DD	28in (710mm)
1240199 – LH 8"	UCN/SCN	26in (660mm)	DD	28in (710mm)
1240298 – RH 10"	UCN/SCN	28in (710mm)	DD	30in (760mm)
1240299 – LH 10"	UCN/SCN	28in (710mm)	DD	30in (760mm)
1240398 – RH 12"	UCN/SCN	30in (760mm)	DD	32in (810mm)
1240399 – LH 12"	UCN/SCN	30in (760mm)	DD	32in (810mm)

